## artefact

A luxury collection of engineered timber that encompasses a plethora of natural colour and grain variation.

Species	European Oak
Sustainability	FSC® Certified
Grade	Rustic
Texture	Brushed Reactive Stain




## COLLECTION

Inspired by objects that have been treasured, preserved and enjoyed for generations, Artefact is our new premium timber flooring collection that sets the standard high for unique timber.


Artefact's high-end reactive stain is carefully applied to each plank, permeating the surface to create a dramatic and sophisticated plethora of natural colours. Each Artefact plank is vastly different from the other and creates an irreplicable look once laid.

Sourced and crafted in Poland, the Artefact collection's colour and grain variation are not to be missed.



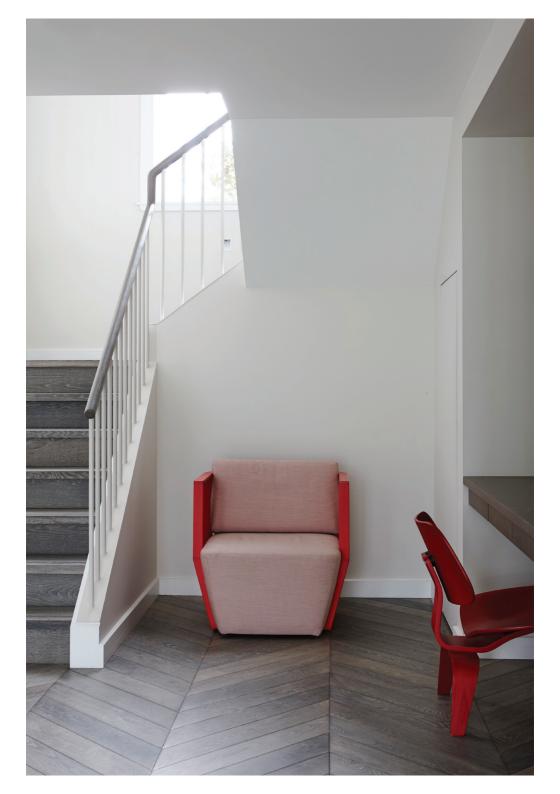


Artefact is available in 220mm wide planks and Herringbone pattern with matching nosings.



## PLANK

Thickness	15/4mm
Width	220mm
Length	1800-2200mm (<33% shorts)
Construction	2-Layer Engineered



## HERRINGBONE PARQUET

Thickness	15/4mm
Width	135mm
Length	600mm
Construction	2-Layer Engineered

## STAIR NOSING



Thickness (Tread)	15/4mm
Width x Height (Face)	100mm x 40mm
Length	1300mm
Construction	2-Layer Engineered

AMMONITE AMULET FLINT








OBSIDIAN





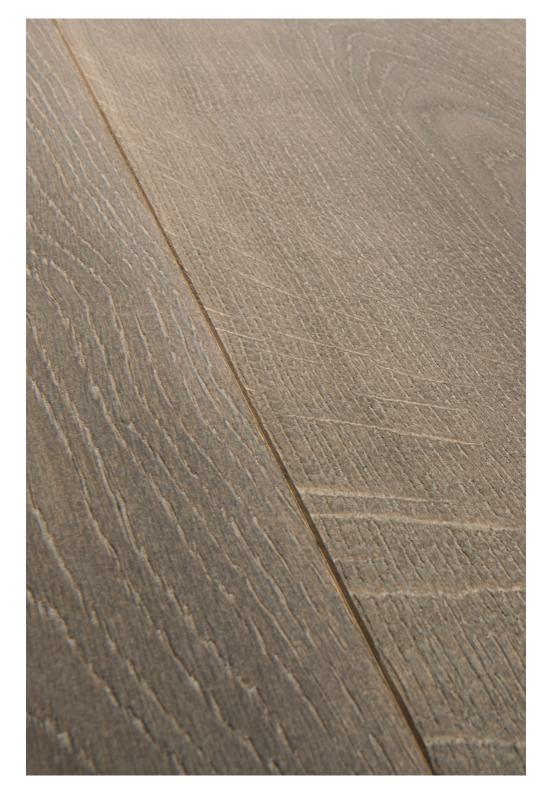

## COLOURS

Artefact's high-end reactive stain is carefully applied to each plank, permeating the surface to create a dramatic and sophisticated plethora of natural colours.



Herringbone     Rustic     ART-AMMRH       Nosing     Rustic     SN-ARTAMM	
<b>Herringbone</b> Rustic ART-AMMRH	
PlankRusticART-AMMRP	
AMMONITE	
Format Grade Code	



Nosing

## AMULET Plank Rustic ART-AMURP Herringbone Rustic ART-AMURH

SN-ARTAMU

Rustic



# FLINT Plank Rustic ART-FLRP Herringbone Rustic ART-FLRH Nosing Rustic SN-ARTFL



OBSIDIAN			
Plank	Rustic	ART-ORP	
Herringbone	Rustic	ART-ORH	
Nosing	Rustic	SN-ARTO	
·			

## PRODUCT DETAILS

Species	European Oak
Origin	Central Europe
Grade	Rustic
Thickness	15mm
Wear Layer	4mm Solid European Oak
Bevel	Bevel 4-Sides (1.2mm)
Construction	2-Layer Engineered
Core	Birch Plywood
Surface Texture	Brushed Reactive Stain
Finish	Pre-finished Bona® Matte Lacquer
Surface Sheen	Matte

## INSTALLATION

Method	Glue Down (Double Stick for Multi-Level)
Joint Profile	Tongue and Groove
Substrates <sup>A</sup>	Plywood/Particle Board/Concrete/Existing Timber
Applications	Interior Flooring/Walls/Ceilings/Other
Usage Classes	Residential/Commercial
Underfloor Heating <sup>A</sup>	Hydronic/Electric <sup>B</sup>
Wet Area Suitability	Contact Forté

### STRUCTURAL WARRANTY

Residential	25 Years
Commercial	5 Years
SUSTAINABILITY	
Certification	FSC® Certified
TECHNICAL SPEC	CIFICATIONS
Reaction to Fire	Awaiting Test Results
Wear Layer Density	650-700kg/m <sup>3</sup>
FORMALDEHYDE	EMISSION
AS/NZS 2098.11	E1 (0.03mg/L) Low VOC, No added Formaldehyde

## SLIP RATINGS

AS/NZS 4586 Wet Test Classification F, Mean COF 0.55

AS/NZS 4586 Dry Test Classification X, Pendulum Mean 42 BPN

A. Enquire about others

B. Electric Systems set in screed (ensure screed is suitable for underfloor heating)

Find us on Masterspec View Collection



