

# /muuro

A clean, contemporary collection of engineered timber wall and ceiling panelling products with an architectural aesthetic.

Species	European Oak / American Walnut
Sustainability	PEFC® Certified
Grade	Clear
Texture	Brushed / Smooth



## COLLECTION

Muuro is an elegant interior panelling collection that is straightforward, inexpensive and easy to install. With minimal wood knots and markings, Muuro's flawless surface provides a streamlined and sophisticated nature.


Muuro provides an excellent alternative to traditional timber panelling and sarking products. Its authentic timber veneer offers the same look at a much more affordable price, whilst its engineered construction ensures a structurally stable product that will not warp or bow like solid timber products.





FORMATS

Muuro is supplied in pre-finished 2700mm lengths with no shorts, unlike solid timber, meaning a seamless, join-free look can be achieved when laying vertically on walls up to 2700mm high.



PLANK

Thickness	10/0.6mm
Width	125mm
Length	2700mm
Construction	2-Layer Engineered



CORNER PROFILE

Thickness	10/0.6mm
Width	25mm x 25mm
Length	2700mm
Construction	2-Layer Engineered

BUFF OAK



FRESCO OAK




SIENNA OAK



UMBER WALNUT



NOIR OAK

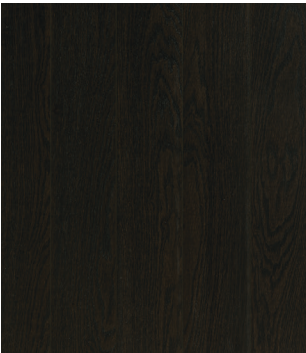



COLOURS

Muuro is available in a range of colours to suit many interiors including four styles in Oak and one in American Walnut.



Format	Grade	Code
<b>BUFF OAK</b>		
Plank	Clear	MU-BCP
Corner Profile	Clear	CP-MUB



<b>FRESCO OAK</b>		
Plank	Clear	MU-FCP
Corner Profile	Clear	CP-MUFR



<b>SIENNA OAK</b>		
Plank	Clear	MU-SCP
Corner Profile	Clear	CP-MUS



<b>UMBER WALNUT</b>		
Plank	Clear	MU-UWCP
Corner Profile	Clear	CP-MUWW



<b>NOIR OAK</b>		
Plank	Clear	MU-NCP
Corner Profile	Clear	CP-MUN

PRODUCT DETAILS

Species	European Oak / American Walnut
Origin	Central Europe / United States
Grade	Clear
Thickness	10mm
Wear Layer	0.6mm
Bevel	Micro-Bevel on Long Edges
Construction	2-Layer Engineered
Core	Moisture Resistant HDF
Surface Texture	Brushed (Oak) / Smooth (Walnut)
Finish	Pre-finished Bona® Matte Lacquer
Surface Sheen	Extra Matte (4-8%)

INSTALLATION

Method	Glue and Secret Pin
Joint Profile	Locking Unifit X®
Substrates <sup>A</sup>	Plaster Board/Plywood/MDF Board
Applications	Interior Walls/Ceilings
Usage Classes	Residential/Commercial
Wet Area Suitability	Contact Forté

- A. Enquire about others  
B. Group 1 Fire Rating for Walls and Ceilings can be achieved with an intumescent coating

STRUCTURAL WARRANTY

Residential	25 Years
Commercial	5 Years

SUSTAINABILITY

Certification	PEFC® Certified
	Greenguard Certified

TECHNICAL SPECIFICATIONS

Reaction to Fire	Walls/Ceilings <sup>B</sup> : Group 3/Class Dfl-s1
Wear Layer Density	650-700kg/m³
Thermal Conduction	0.13W/mK
CE Certification	Yes

EMISSION TESTING

Formaldehyde AS/NZS 2098.11	Super E0 (0.27mg/L)
VOC ISO 16000	A+
Carb-2 and PCP Free	Compliant

Find us on  
Masterspec



View Collection  
on our website



Auckland  
299 Great North Road  
Grey Lynn, Auckland

Wellington  
262 Thorndon Quay  
Pipitea, Wellington

Queenstown  
33 Brookes Road  
Frankton, Queenstown

forte.co.nz  
info@forte.co.nz  
0508 35 66 77

forte