



HERRINGBONE SPECIFICATION SHEET

Indus Collection Engineered T&G herringbone by Forté. 18mm thick, 120mm wide, 600mm length. Glue down installation method onto substrate. Light feature grade, pre-finished with UV Cured Matte Lacquer

PRODUCT DETAILS

Collection	Indus
Product Type	Herringbone
Availability	Stocked
Total Thickness	18mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing Layer	Meranti Veneer
Construction	Multi-layer Engineered
Re-sands	1-2 (approx. 1mm removed per re-sand)
Surface Texture	Lightly Brushed
Surface Sheen	Matte (8%)
Edge Style	Micro bevelled 4 sides (0.7mm)
Status	Pre-finished (no additional coats required)
Finish	UV Cured Matte Lacquer (6 coats)
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Dependant on colour, visit forte.co.nz for accurate filler colour

The Indus Collection is also available in matching stair nosings, feature grade planks and selected prime grade planks

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

Images are colour representation only



Atacama



Sahara



Patagonia

SUSTAINABILITY

Sustainably Sourced | FSC® available on request
Low VOC | No added Formaldehyde

INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (1 fixed tongue + 3 grooves. 1 loose tongue provided)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.1mg/L)
Wear Layer Density	720kg/m ³
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN
Thermal Resistance	0.17 m ² K/W

PACK INFORMATION

Pack Size	0.72m ²
Pack Weight	8.80kg
Pieces per pack	10

Plank Profile

INDUS PLANK

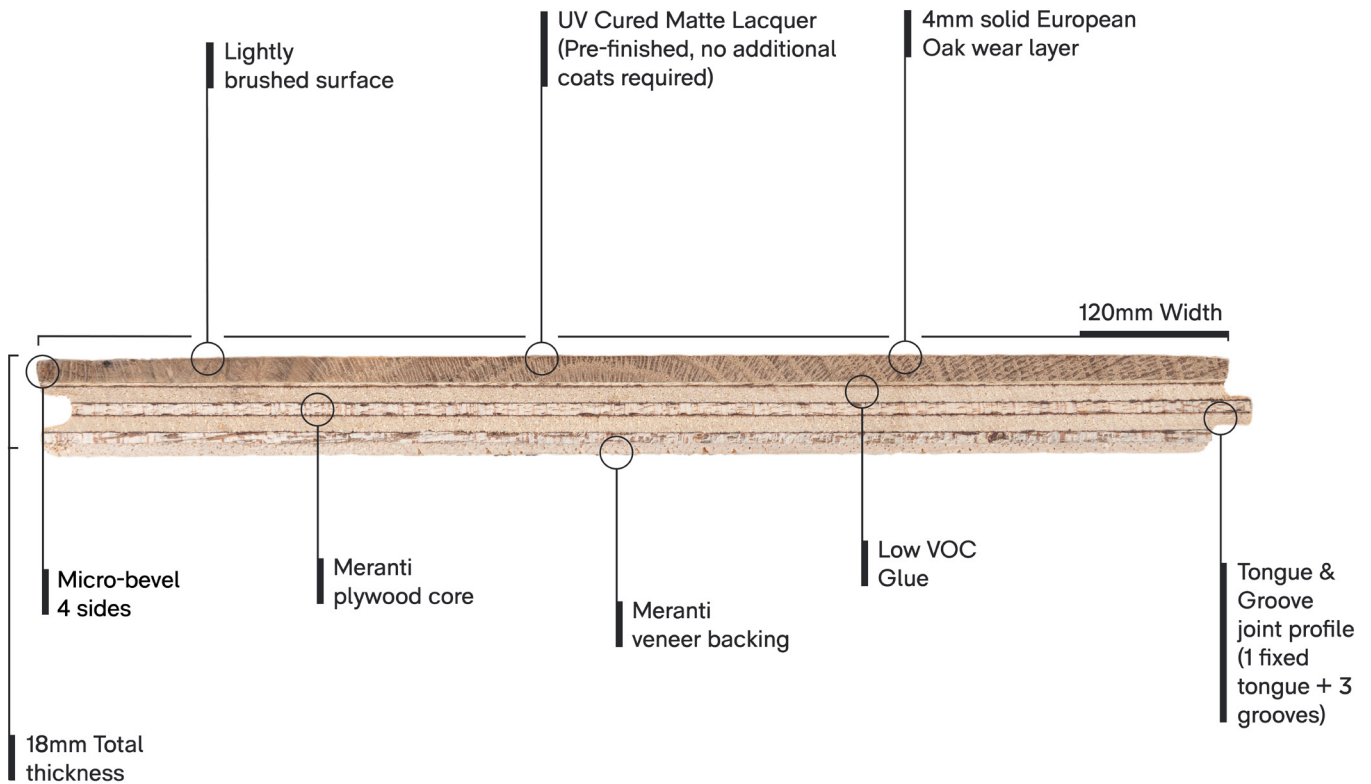

INDUS – LIGHT FEATURE GRADE



An Indus light feature grade plank will typically contain unlimited natural colour variation. This grade allows for less frequent, smaller knots that will be finished with filler. Less sapwood should be expected throughout the planks. Cracks and checks will be not be present.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

INDUS 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Indus Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation