

/smartfloor

HERRINGBONE LIGHT FEATURE SPECIFICATION SHEET

Smartfloor Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 120mm wide, in 600mm lengths. Direct stick installation method onto substrate. Light feature grade, pre-finished with PureMatte Lacquer.

PRODUCT DETAILS


Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Light

Selected colours of the Smartfloor Collection are available in: 190mm planks, chevron pattern and stair nosings to match

STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties


Images are colour representation only




Blond Oak




Clay Oak



Natural Oak



Tawny Oak



Marron Oak

INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS



Reaction to Fire (Floors)	Critical Flux 5.7kw/m ²
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m ³
Formaldehyde Emission	E1
Slip Ratings	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75

PACK INFORMATION

Pack Size	0.864m ²
Pieces per pack	6 x right + 6 x right
Pack Weight	9kg

Herringbone Profile

SMARTFLOOR HERRINGBONE

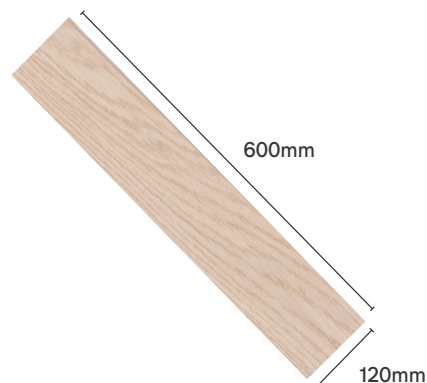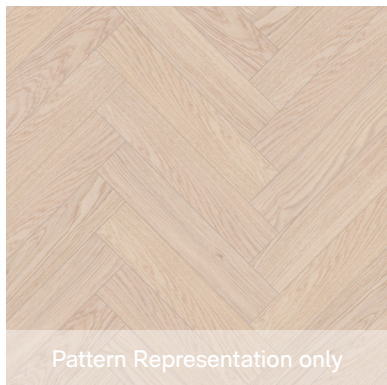

Plank is tongue and groove on all four sides.
Product supplied in right and left planks.

SMARTFLOOR – LIGHT FEATURE GRADE



A Smartfloor Light Feature grade plank will consist of slight colour variation. Expect to see minimal sapwood throughout the planks as well as smaller and less frequent knots. Minimal cracks and checks will be present, some discreet features are finished with light filler to blend in with the timbers natural colour.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structure Warranty

SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation