


A distinctively refined collection of premium engineered timber in rich, complex colours inspired by captivating desertscapes.

Species	European Oak
Sustainability	Sustainably Sourced
Grade	Feature, Prime and Light Feature
Texture	Lightly Brushed

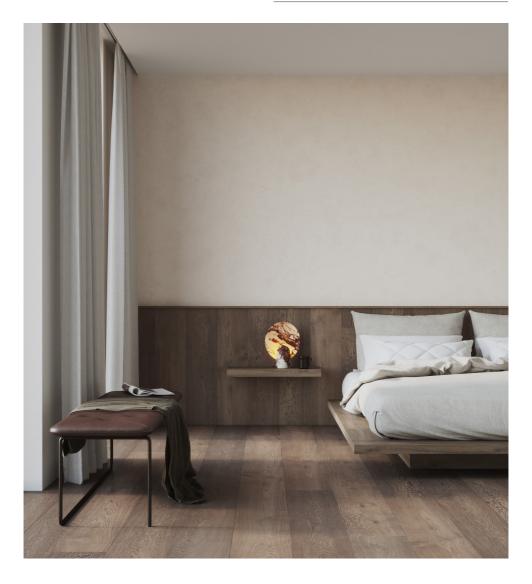


COLLECTION

Inspired by the earthy colours and captivating contours of desertscapes, Indus is our new premium timber flooring collection that embodies some of the world's most striking backdrops. The Indus Collection lets you create a whole new world within your interior.


Crafted from premium European oak with a plywood core and backing veneer, the Indus Collection has been developed to offer a look that is as distinctively refined.

Small bevels and a lightly brushed surface help to create a seamless, all-encompassing effect with less definition between planks, evocative of desert sands.



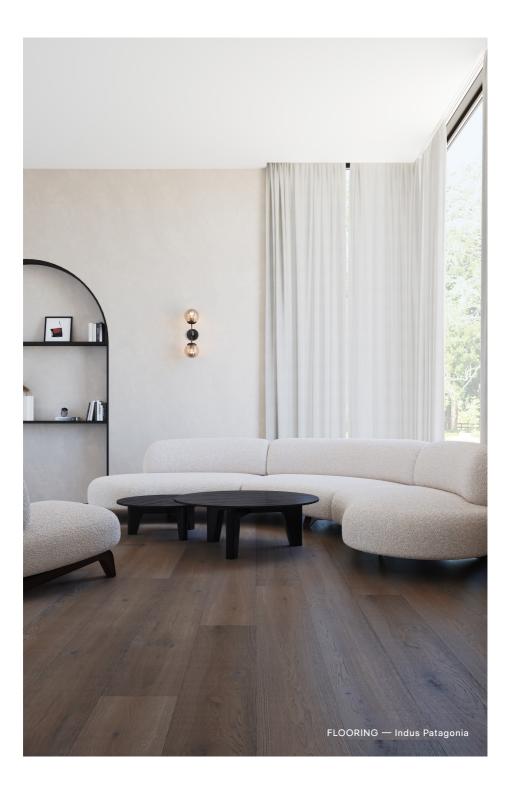


Indus is available in 240mm wide feature and prime planks and Herringbone with matching nosings.



PLANK

Thickness	18/4mm
Width	240mm
Length	2400mm (<25% shorts)
Construction	Multi-Layer Engineered



HERRINGBONE PARQUET

Thickness	18/4mm
Width	120mm
Length	600mm
Construction	Multi-Layer Engineered

STAIR NOSING




Thickness (Tread)	18mm
Width x Height (Face)	75mm x 36mm
Length	1400mm
Construction	Solid Oak



TANAMI



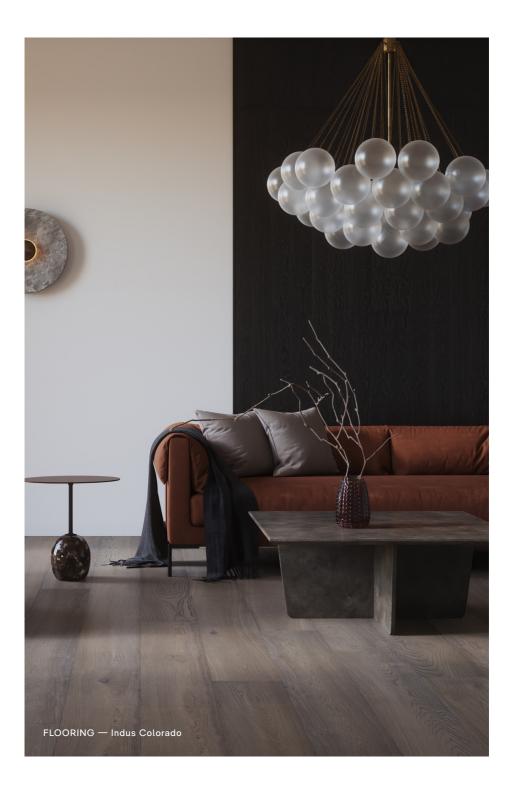

COLOURS

Indus captures the natural beauty of sun-drenched sands and smooth dunes of deserts from around the globe.

Format	Grade	Code
ATACAMA		
Plank	Feature	IN-AFP
	Prime	IN-APP
Herringbone	Light Feature	IN-AFH
Nosing	Light Feature	SN-INA
MOJAVE		
Plank	Feature	IN-MFP
	Prime	IN-MPP
Nosing	Light Feature	SN-INM
KHARAN		
Plank	Feature	IN-KFP
Nosing	Light Feature	SN-INK
SAHARA		
Plank	Feature	IN-SFP
Herringbone	Light Feature	IN-SFH
Nosing	Light Feature	SN-INS

Format	Grade	Code
COLORADO		
Plank	Feature	IN-CFP
Nosing	Light Feature	SN-INC
PATAGONIA		
Plank	Feature	IN-PFP
Herringbone	Light Feature	IN-PFH
Nosing	Light Feature	SN-INP
TANAMI		
Plank	Feature	IN-TFP
Nosing	Light Feature	SN-INT

PRODUCT DETAILS

Species	European Oak
Origin	Central Europe
Grade	Feature, Prime and Light Feature
Thickness	18mm
Wear Layer	4mm Solid European Oak
Bevel	Micro-Bevel 4-Sides
Construction	Multi-Layer Engineered
Core	Meranti Plywood
Backing	Meranti Veneer
Surface Texture	Lightly Brushed
Finish	Pre-finished UV-Cured Matte Lacquer
Surface Sheen	Matte

INSTALLATION

Wet Area Suitability

Method	Glue Down (Double Stick for Multi-Level)
Joint Profile	Tongue and Groove
Substrates ^A	Plywood/Particle Board/Concrete/Existing Timber
Applications	Interior Flooring/Walls/Ceilings/Other
Usage Classes	Residential/Commercial
Underfloor Heating	Awaiting Test Results / Contact Forté

Contact Forté

STRUCTURAL WARRANTY

STRUCTURAL WARRANTY	
Residential	25 Years
Commercial	5 Years
SUSTAINABILITY	
Certification	Sustainably Sourced / FSC® on Request
TECHNICAL SPECII	FICATIONS
Reaction to Fire	Floors: Critical Flux 2.2kw/m² (generic)
	Walls/Ceilings: Group 3/Class Dfl-s1
Wear Layer Density	720kg/m³
Thermal Conductivity	0.15 W/mk (EN 12664)
FORMALDEHYDE E	MISSION
AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
SLIP RATINGS	
AS/NZS 4586 Wet Test	Awaiting Test Results / Contact Forté
AS/NZS 4586 Wet Test	Awaiting Test Results / Contact Forté

Find us on Masterspec





