

/moda

FEATURE PLANK SPECIFICATION SHEET

Moda collection engineered T&G plank by Forté.
15mm thick, 220mm wide, 2200mm length. Direct stick
installation method onto substrate. Feature grade,
pre-finished with UV cured matte lacquer.

PRODUCT DETAILS

| | |
|-----------------|--|
| Collection | Moda |
| Product type | Engineered plank |
| Availability | Stocked |
| Total thickness | 15mm |
| Width | 220mm |
| Length | 2200mm |
| % of shorts | Up to 25% |
| Wear layer | 4mm solid european oak |
| Core | Eucalyptus plywood |
| Backing layer | Birch |
| Construction | Multilayer engineered |
| Re-sands | Up to 2 (approx. 1mm removed per re-sand) |
| Surface texture | Brushed |
| Surface sheen | Gloss 3-5% (Como - gloss 5-7%) |
| Bevel | Micro bevel 4 sides |
| Status | Pre-finished (no additional coats required) |
| Finish | UV cured matte lacquer |
| Species | European oak |
| Wood grade | Feature (refer page 2 for details) |
| Filler colour | Dark |

The Moda Collection is also available in light feature plank, herringbone pattern and stair nosing.

STRUCTURAL WARRANTY

| | |
|---------------------|--|
| 5 year commercial | For terms and conditions see |
| 25 year residential | www.forte.co.nz/warranties |



INSTALLATION

| | |
|-----------------------|--|
| Installation method | Glue down (double stick for multi-level) |
| Suitable substrates | Plywood, particle board, concrete, existing timber - enquire for others |
| Joint profile | Tongue and groove (4 sides) |
| Suitable applications | Flooring, walls, ceilings |
| Suitable uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor heating | • Hydronic systems • Electric systems set in screed (ensure screed suitable for UFH) - enquire for others |
| Wet area suitability | Contact the Forté team for information 0508 35 66 77 |

TECHNICAL SPECIFICATIONS


| | |
|--|--|
| Reaction to fire (floors) | Critical flux 5.0kw/m ² |
| Reaction to fire (walls and ceilings) | Group 3 / class Dfl-s1 (group 1 can be achieved with intumescent coating) |
| Wear layer density | 700kg/m ³ |
| Formaldehyde emission | |
| AS/NZS 2098.11 | E0 (0.1mg/L) Low VOC, no added formaldehyde |
| Slip ratings | |
| AS/NZS 4586 wet test | Classification F, Mean COF 0.60 |
| AS/NZS 4586 dry test | Classification X, Pendulum Mean 43 BPN |

PACK INFORMATION

| | |
|-----------------|----------------------|
| Pack size | 2.904m ² |
| Pack weight | 30.51kg |
| Pieces per pack | 4-5 full + 1-2 split |

Plank Profile

MODA PLANK

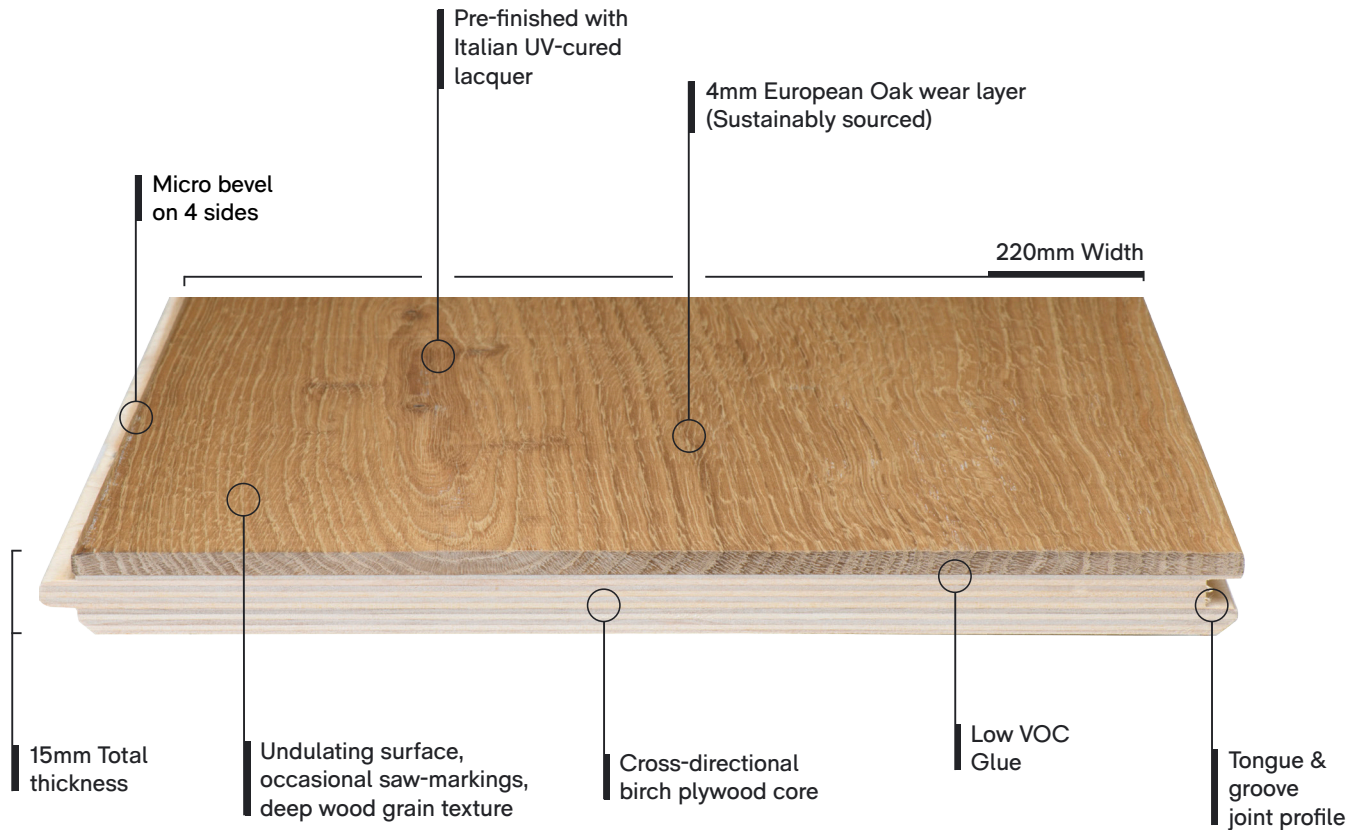

MODA – FEATURE GRADE



A Moda feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's product specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Collection comes with a full 25 year residential structural warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Collection comes with a full 5 year commercial structural warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté installation guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/Installation