/urban

PLANK FEATURE GRADE **SPECIFICATION SHEET**

Urban Collection Engineered Locking plank by Forté. 14mm thick, 190mm wide and 1.83m length. Glue down installation method onto substrate. Feature grade, pre-finished with Bona® Matte Lacquer.

CodeMark Certified.



Collection Urban

Product Type Engineered Plank

Stocked **Availability** 14mm **Total Thickness** Width 190mm 1830mm Length **Up to 17%** % of Shorts

Wear Layer 3mm Solid European Oak

Core Hevea

3-layer Engineered Construction

Re-sands Approximately 1-2 (approx. 1mm

removed per re-sand)

Surface Texture Brushed

Surface Sheen Matte (Gloss Level 8-12%)

Bevel Micro-bevel 4 sides

Pre-finished **Status**

(no additional coats required)

Finish Bona® Matte Lacquer (7 Coats) **Species** European Oak PEFC® Certified **Wood Grade** Feature (refer to page 2 for details)

Filler Colour Dark

The Urban Collection is also available in: Selected prime grade planks and Stair Nosing.

STRUCTURAL WARRANTY

10 Year Commercial For terms and conditions see 25 Year Residential www.forte.co.nz/warranties

SUSTAINABILITY

PEFC® Certified



Copenhagen



Barcelona







Prague





Oslo



Milan



Tokyo



Seoul

INSTALLATION

Installation Method	Glue down (preferred) or floating
	(Double Stick for Multi-level)

Suitable Substrates Plywood, Particle Board, Concrete,

existing timber - enquire for others

Joint Profile Välinge 5G Click® **Suitable Applications** Flooring, Walls, Ceilings

Suitable Uses Residential homes, hospitality, retail

stores, restaurants, apartments **Underfloor Heating** · Hydronic Systems

· Electric Systems set in screed (ensure screed suitable for UFH) -

enquire for others

Contact the Forté team for information Wet Area Suitability

0508 35 66 77

TECHNICAL SPECIFICATIONS

Reaction to Fire (Floors) Critical Flux 5.0kw/m² Reaction to Fire (Walls Group 3 / Class Dfl-s1 (Group 1 can and Ceilings) be achieved with intumescent coating) **Wear Layer Density** 700kg/m³

Formaldehyde Emission

AS/NZS 2098.11 E0 (0.1mg/L) No Added Formaldehyde

Slip Ratings AS/NZS 4586 Dry Test

Classification F, Mean COF 0.65 AS/NZS 4586 Wet Test Classification X, Pendulum Mean 39


BPN

PACK INFORMATION

Pack Size 2.086m² Pieces per pack 5 full planks, and up to 1 split plank **Pack Weight Pack Dimensions** W 207mm x L 1845mm x H 90mm

Plank Profile

URBAN PLANK

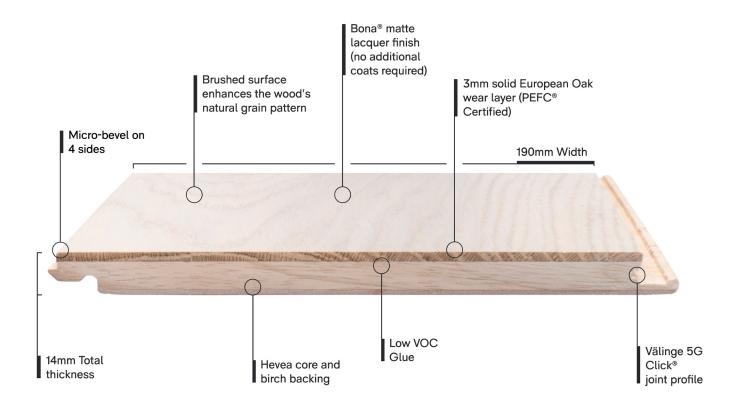

URBAN - FEATURE GRADE



An Urban feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots. Sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

URBAN 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Urban Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

URBAN 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Urban Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE URBAN COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Urban timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation